

No.2203

## Test mangle

The test mangle is widely used for impregnation processing of papers and woven textiles, capable of adjusting the gap between the rollers with the right and left screws. This tester is designed to apply pressure uniformly on the right and left sides, most suitable for operations in the laboratory.

There are two types, manual with handle and motor-driven.

**Motor drive type**

**Roll:** 70mm in diameter Surface length 400mm

**Material:** NBR(standard)

**Speed:** 0.2 ~ 2.8m/min

**Power source:** Single phase 200/220V 50/60Hz 2A

**Outer dimension:** 610 x 330 x 400mm

**Instrument weight:** 38kg

**Motor drive Air press type**

**Roll:** 70mm in diameter Surface length 50mm

**Material:** NBR(standard) or SUS304

**Speed:** 1 ~ 5m/min

**Pressure:** 10 ~ 100N/cm

**Air source:** 0.5MPa

**Power source:** Single phase 200/220V 50/60Hz 2A

**Outer dimension:** 1000 x 800 x 450mm


**Instrument weight:** 68kg



Motor drive type



Motor drive Air press type

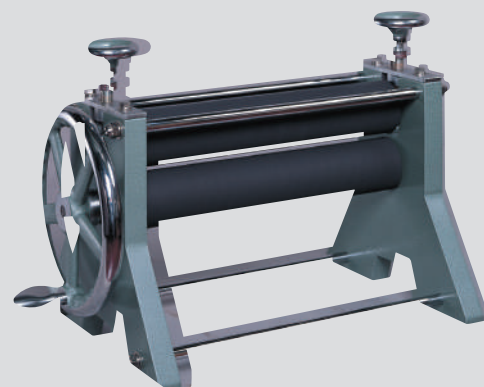

Manual type